



## CARINA V1

---

LED-1L17E700KNV76/425 DALI 3K#


[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# CARINA V1

Product code: CAR67102



Type: LED-1L17E700KNV76/425 DALI 3K#

Short description of the luminaire: White colour | semi-recessed LED light DALI | TRIPLEX OPAL hand blown glass shade |



## Technical

Types of luminaires	Dimmable
Mounting type	semi-recessed
Base material	steel
Shade material	three-layer glass TRIPLEX OPAL
Base color	white Ral9003
Shade color	white
Holding the shade	folding system
Mounting location	ceiling/wall
Width	380 mm
Length	380 mm
Height	40 mm
Diameter	ø 380 mm
mounting holes (diameter)	none
Cable entrance	none
Energy Class	D
Impact strength	IK01
Operating temperature	from -20°C to +30°C

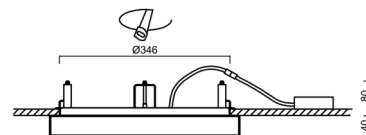


## Electric

Power consumption	25 W
Ingress Protection	IP44
Socket	LED modul
terminal block	none
Automatic circuit breaker type B10A	19 pcs
Automatic circuit breaker type B16A	32 pcs
Automatic circuit breaker type C10A	31 pcs
Automatic circuit breaker type C16A	53 pcs

## Luminous

Lum. flux of luminaire	2380 lm
Lum. flux of light source	3770 lm
Luminaire efficacy	95 lm/W
Temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

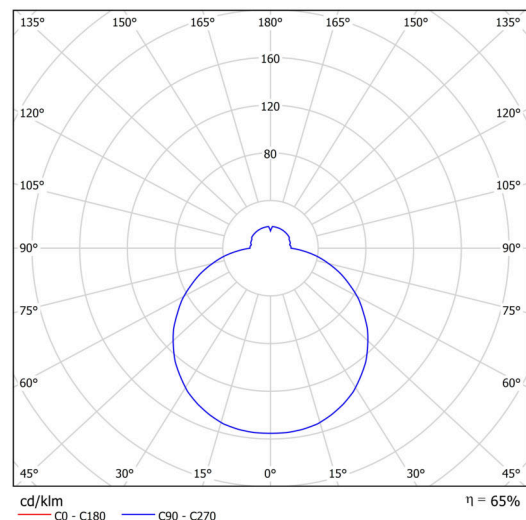


Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

Logistic

EAN	8591728010614
Weight NTTO	3.5 Kg
Weight BTTO	4 Kg
Number of cartons	1 pcs
Package volume	0.032 m <sup>3</sup>
Package 1 width	0.38 m
Package 1 length	0.38 m
Package 1 height	0.22 m
Warranty*	60 months

\*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:

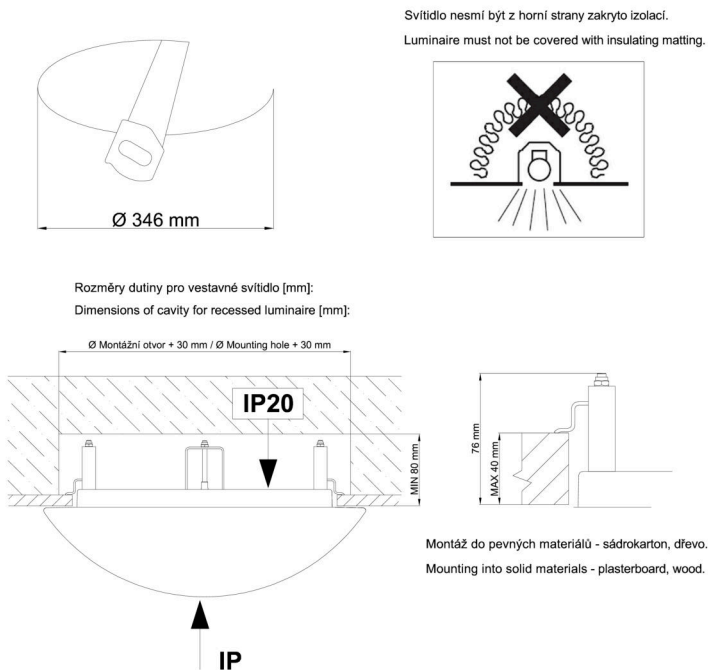

## Additional assortment:

## Lampshade

Product code	Name	Color	Description	Picture	Drawing
20130	425	white	příslušenství		