



ELEKTRA 4

LED-1L12E500/IN-172P/NK1W 4K#

WWW.OSMONT.CZ

ELEKTRA 4

Product code: ELE57747



Type: LED-1L12E500/IN-172P/NK1W 4K#

Short description of the luminaire: White industrial LED light with emergency unit combined and polycarbonate shade.



Technical

| | |
|------------------------------|--------------------|
| Types of luminaires | Emergency combined |
| Mounting type | industrial |
| Base material | polycarbonate |
| Shade material | opal polycarbonate |
| Base color | white Ra9003 |
| Shade color | white |
| Holding the shade | screws |
| Mounting location | ceiling/wall |
| Width | 260 mm |
| Length | 260 mm |
| Height | 110 mm |
| Diameter | ø 260 mm |
| mounting holes (diameter) | 4xø5mm |
| Installation wire (diameter) | 2xø14mm |
| Energy Class | D |
| Impact strength | IK10 |

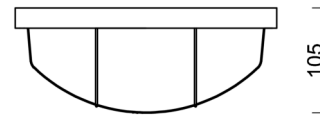


Electric

| | |
|-------------------------------------|---------------------|
| Power consumption | 7 W |
| Ingress Protection | IP65 |
| Socket | LED modul |
| Battery type | NiCd |
| Emergency time | 3 hours |
| terminal block | snap terminal block |
| Automatic circuit breaker type B10A | 32 pcs |
| Automatic circuit breaker type B16A | 48 pcs |
| Automatic circuit breaker type C10A | 57 pcs |
| Automatic circuit breaker type C16A | 86 pcs |

Luminous

| | |
|---|--------------|
| Lum. flux of luminaire | 830 lm |
| Lum. flux of light source | 1040 lm |
| Lum. flux of light source in emergency mode | 150 lm |
| Luminaire efficacy | 118 lm/W |
| Temperature | 4000 K |
| Rated life time LED L80/B10 | 100000 hours |
| CRI | Ra80 |
| MacAdam | 3 |
| Blue light hazard | Risk group 0 |

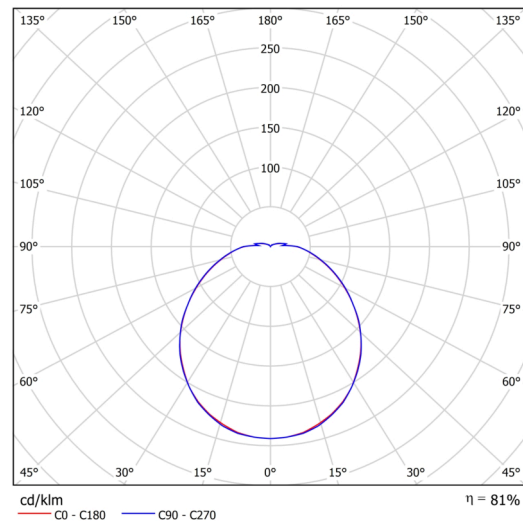


Eulum data for calculation programs are available at

Logistic

| | |
|-------------------|----------------------|
| EAN | 8591728095086 |
| Weight NTTO | 0.7 Kg |
| Weight BTTO | 0.9 Kg |
| Number of cartons | 1 pcs |
| Package volume | 0.009 m ³ |
| Package 1 width | 0.285 m |
| Package 1 length | 0.27 m |
| Package 1 height | 0.115 m |
| Warranty* | 60 months |


*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:

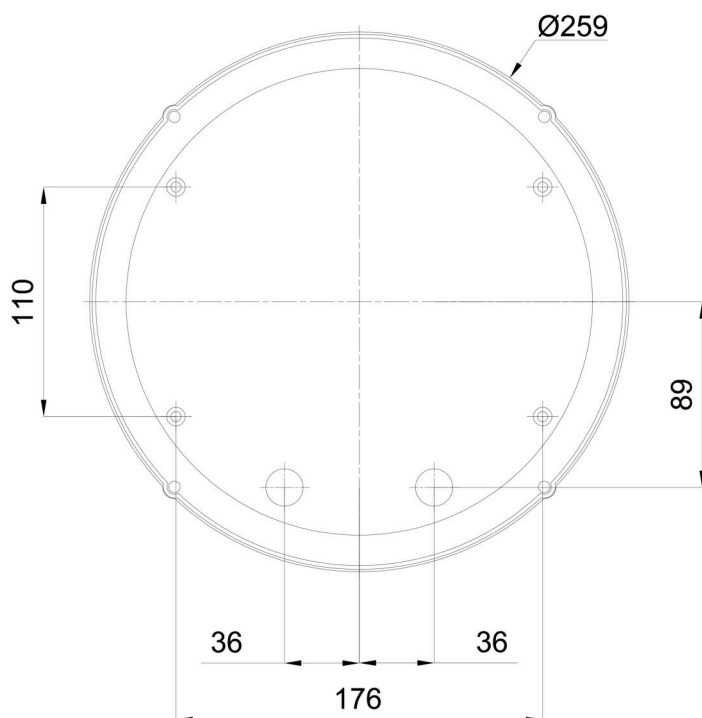

Additional assortment:

Lampshade

| Product code | Name | Color | Description | Picture | Drawing |
|--------------|------|-------|-------------|---|---------|
| 20552 | 172P | white | |  A small, white, spherical lampshade with a slightly textured surface, shown against a white background. | |