



ISIS L3A PM-M

LED-5L06E550ZL11/PM3AM/L100 NK3H NB 3K#

WWW.OSMONT.CZ

ISIS L3A PM-M

Product code: ISI75018


Type: LED-5L06E550ZL11/PM3AM/L100 NK3H NB 3K#

Short description of the luminaire: Stainless steel brushed | pendant LED light with emergency backup combined | matt PMMA shade | steel wire pendant (with supply cable) 100 cm |



Technical data

| | |
|---------------------------|------------------------------|
| Types of luminaires | Emergency combined |
| Mounting type | Suspended - wire |
| Base material | stainless steel steel |
| Shade material | opal polymethyl methacrylate |
| Base color | brushed stainless steel |
| Shade color | white |
| Holding the shade | steel holder |
| Mounting location | ceiling |
| Width | 350 mm |
| Length | 350 mm |
| Height | 350 mm |
| Diameter | ø 350 mm |
| Suspension length | 1000 mm |
| mounting holes (diameter) | none |
| Energy Class | D |
| Impact strength | IK06 |
| Operating temperature | from +5°C to +30°C |

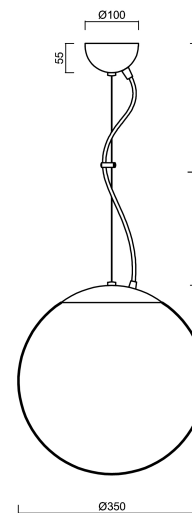


Electrical data

| | |
|-------------------------------------|-----------|
| Power consumption | 26 W |
| Ingress Protection | IP40 |
| Socket | LED modul |
| Battery type | LiFePO4 |
| Emergency time | 3 hours |
| terminal block | none |
| Automatic circuit breaker type B10A | 15 pcs |
| Automatic circuit breaker type B16A | 25 pcs |
| Automatic circuit breaker type C10A | 31 pcs |
| Automatic circuit breaker type C16A | 48 pcs |
| Number of LED drivers | 1 |

Luminous data

| | |
|---|--------------|
| Lum. flux of luminaire | 3590 lm |
| Lum. flux of light source | 4080 lm |
| Lum. flux of light source in emergency mode | 200 lm |
| Luminaire efficacy | 138 lm/W |
| Chromaticity temperature | 3000 K |
| Rated life time LED L80/B10 | 100000 hours |
| CRI | Ra80 |
| MacAdam | 3 |

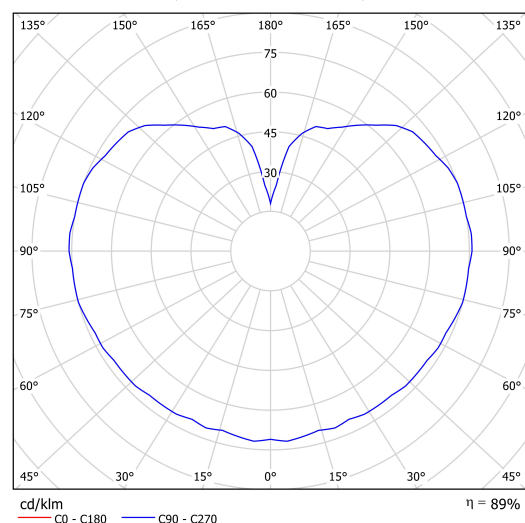

TECHNICAL SHEET



| | |
|-------------------|--------------|
| Blue light hazard | Risk group 0 |
|-------------------|--------------|

*Eulum data for calculation programs are available at
www.osmont.cz.*

Logistical data

| | |
|-----------|---------------|
| EAN | 8591728223540 |
| Warranty* | 60 months |

**The warranty for the batteries is valid for 36 months from the date of purchase.*

Additional assortment:

Lampshade

| Product code | Name | Color | Picture | Drawing |
|--------------|---------------|-------|---|---------|
| 20727 | PM3AM (350mm) | white |  | |