



TITAN D2

LED-1L16EMP700KN83/PC08/DP C 3K#

WWW.OSMONT.CZ

TITAN D2

Product code: TIT56282



Type: LED-1L16EMP700KN83/PC08/DP C 3K#

Short description of the luminaire: Black colour | ceiling or wall LED light ON/OFF | multipower driver | opal polycarbonate shade (PC) with decorative collar



Technical data

Types of luminaires	Classic on/off
Mounting type	surface mounted
Base material	steel
Shade material	opal polycarbonate
Base color	black Ral9005
Shade color	white
Holding the shade	folding system
Mounting location	ceiling/wall
Width	440 mm
Length	87 mm
Height	440 mm
Diameter	ø 440 mm
mounting holes (diameter)	2xø5mm
Cable entrance	2xø16mm
Energy Class	D
Impact strength	IK10
Operating temperature	from -20°C to +30°C

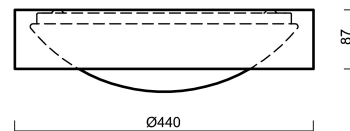


Electrical data

Power consumption	34 W
Ingress Protection	IP54
Socket	LED modul
terminal block	snap terminal block

Luminous data

Lum. flux of luminaire	2780 lm
Lum. flux of light source	5050 lm
Chromaticity temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

Eulum data for calculation programs are available at www.osmont.cz.

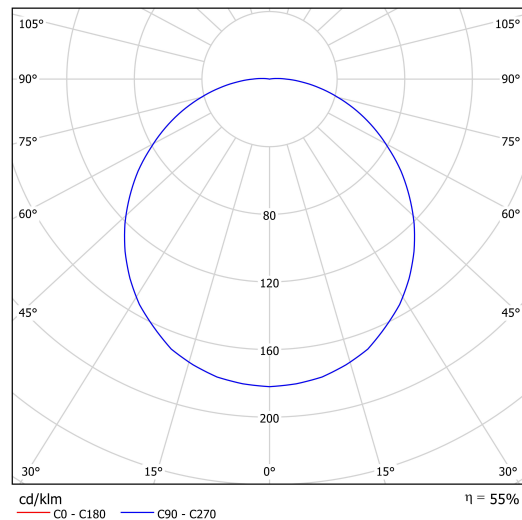

TECHNICAL SHEET




Logistical data

EAN	8591728232979
Number of cartons	1 pcs
Warranty*	60 months


*The warranty for the batteries is valid for 36 months from the date of purchase.

Installation dimensions:

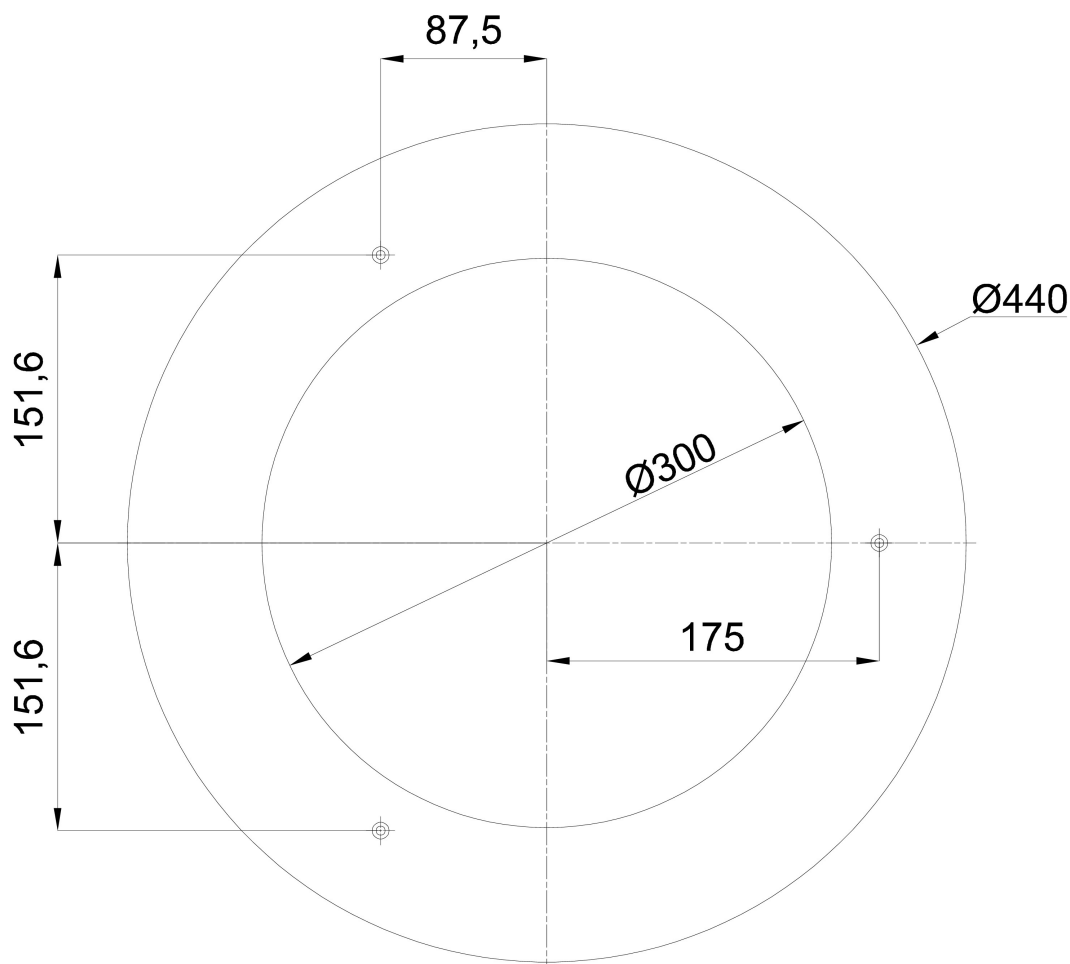

Additional assortment:

Decorative collar

Product code	Name	Color	Picture	Drawing
33549	KN8/DP C	black Ral9005		

Lampshade

Product code	Name	Color	Picture	Drawing
20505	PC08	white	