



ZETA 1 PF

LED-1L64E700K2H/PF91 C DALI 3K#

WWW.OSMONT.CZ

ZETA 1 PF

Product code: ZET60027

Type: LED-1L64E700K2H/PF91 C DALI 3K#

Short description of the luminaire: Black color | surface-mounted LED light | dimmable DALI | indirect lighting version | PMMA matt shade



Technical

| | |
|------------------------------|------------------------------|
| Types of luminaires | Dimmable |
| Mounting type | surface mounted |
| Base material | steel |
| Shade material | opal polymethyl methacrylate |
| Base color | black Ral9005 |
| Shade color | white - black |
| Mounting location | ceiling/wall |
| Width | 400 mm |
| Length | 400 mm |
| Height | 105 mm |
| Diameter | ø 400 mm |
| mounting holes (diameter) | 3xø5mm |
| Installation wire (diameter) | 2xø16mm |
| Energy Class | C |
| Operating temperature | from -20°C to +30°C |



Electric

| | |
|-------------------------------------|---------------------|
| Power consumption | 31 W |
| Ingress Protection | IP40 |
| Socket | LED modul |
| terminal block | snap terminal block |
| Automatic circuit breaker type B10A | 31 pcs |
| Automatic circuit breaker type B16A | 50 pcs |
| Automatic circuit breaker type C10A | 52 pcs |
| Automatic circuit breaker type C16A | 85 pcs |

Luminous

| | |
|-----------------------------|--------------|
| Lum. flux of luminaire | 2780 lm |
| Lum. flux of light source | 4820 lm |
| Luminaire efficacy | 89 lm/W |
| Temperature | 3000 K |
| Rated life time LED L80/B10 | 100000 hours |
| CRI | Ra80 |
| MacAdam | 3 |
| Blue light hazard | Risk group 0 |

Eulum data for calculation programs are available at www.osmont.cz.

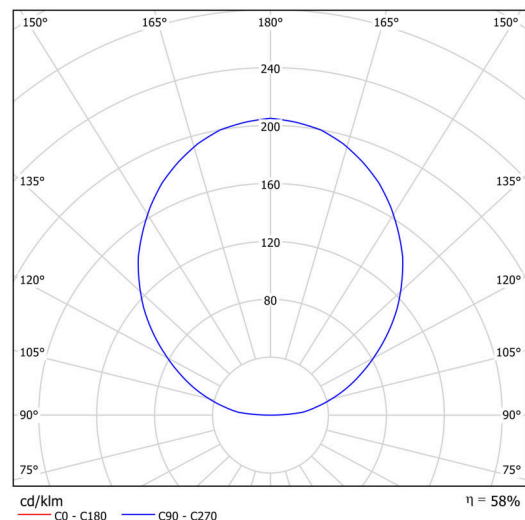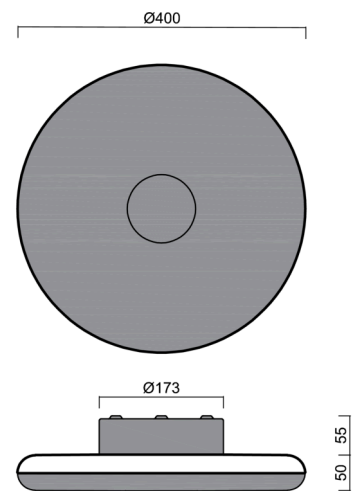

Logistic

| | |
|-------------|---------------|
| EAN | 8591728090548 |
| Weight NTTO | 2.8 Kg |
| Weight BTTO | 3.1 Kg |
| Warranty* | 60 months |

*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:



Additional assortment:

Lampshade

| Product code | Name | Color | Description | Picture | Drawing |
|--------------|------|-------|-------------|--|---------|
| 20668 | PM91 | white | |  | |