OSMONT®

ERIS 4

LED-1L23EMP700K910/414 NK3H 3K##

WWW.OSMONT.CZ

ERIS 4

Product code: ERI67948

Type: LED-1L23EMP700K910/414 NK3H 3K##

Short description of the luminaire: White colour | ceiling or wall LED light with emergency backup combined | multipower driver | TRIPLEX OPAL hand blown glass shade|



Technical data

Types of luminaires	Emergency combined
Mounting type	surface mounted
Base material	steel
Shade material	three-layer glass TRIPLEX OPAL
Base color	white Ral9003
Shade color	white
Holding the shade	folding system
Mounting location	ceiling/wall
Width	540 mm
Length	540 mm
Height	140 mm
Diameter	ø 540 mm
mounting holes (diameter)	4xØ5mm
Cable entrance	2xØ16mm
Energy Class	D
Impact strength	IK01
Operating temperature	from +5°C to +30°C

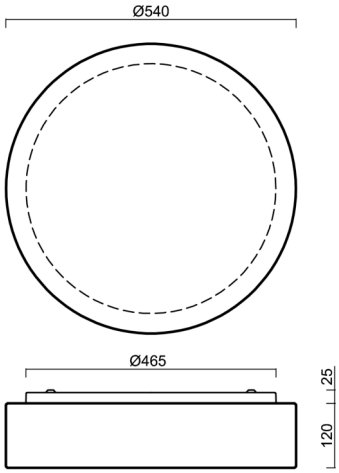

Electrical data

Power consumption	35 W
Ingress Protection	IP43
Socket	LED modul
Battery type	LiFePO4
Emergency time	3 hours
terminal block	snap terminal block
Automatic circuit breaker type B10A	16 pcs
Automatic circuit breaker type B16A	27 pcs
Automatic circuit breaker type C10A	25 pcs
Automatic circuit breaker type C16A	38 pcs
Number of LED drivers	1

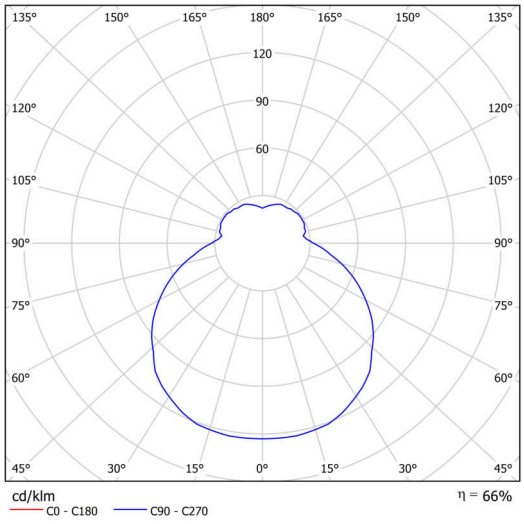

Luminous data

Lum. flux of luminaire	3700 lm
Lum. flux of light source	5610 lm
Lum. flux of light source in emergency mode	200 lm
Luminaire efficacy	105 lm/W
Chromaticity temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80

OSMONT, s.r.o.
HYBRÁLEC 129,
586 01 JIHLAVA, CZ

www.osmont.cz
osmont@osmont.cz
(+420) 567 210 023

MacAdam	3
Blue light hazard	Risk group 0

Eulum data for calculation programs are available at www.osmont.cz.

Multipower

Possibility of output adjustment by the user (DIP switch on the current source).

I [mA]	700	650	600	550	500	450	400	
[%]	100	93	86	79	71	64	57	

Logistical data

EAN	8591728176440
Weight NTTO	7.34 Kg
Weight BTTO	8.1 Kg
Number of cartons	1 pcs
Package volume	0.049 m^3
Package 1 width	0.55 m
Package 1 length	0.55 m
Package 1 height	0.16 m
Warranty*	60 months

**The warranty for the batteries is valid for 36 months from the date of purchase.*

Installation dimensions:

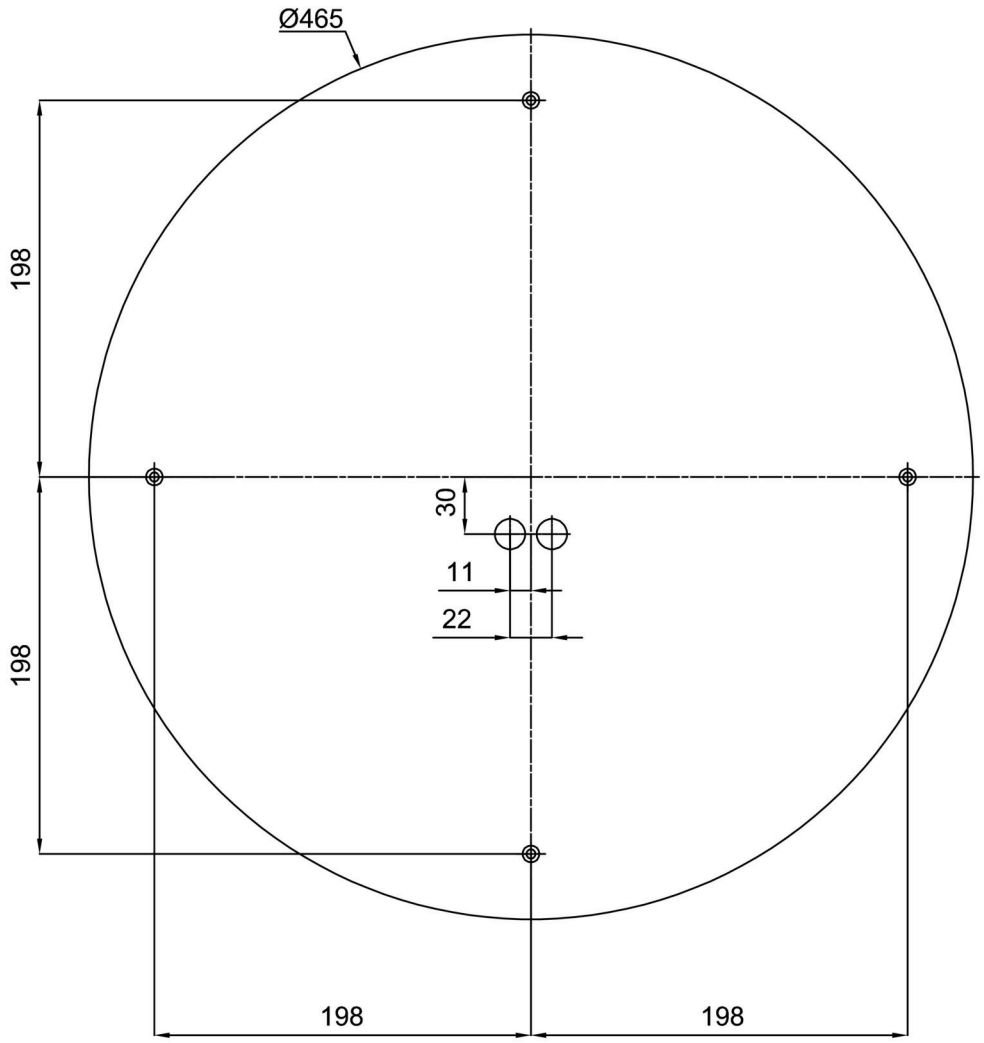

OSMONT, s.r.o.
HYBRÁLEC 129,
586 01 JIHLAVA, CZ

www.osmont.cz
osmont@osmont.cz
(+420) 567 210 023

Additional assortment:

Base for surface mounting

Product code	Name	Color	Picture	Drawing
33503	KN9,K9/BP 2-1 B	white Ral9003		

Lampshade

Product code	Name	Color	Picture	Drawing
20125	414	white		